



Wincomm Corp.

A Leading Display Engine

Solution Company



Full IP65 panel PC WTP-8865 Series

The Rugged and Reliable Industrial Computer

Services for You

- 3F, No. 14, Prosperity Road II, Science-Based Industrial Park, Hsinchu, Taiwan 30078 R.O.C.

w w w . w i n c o m m . c o m . t w



The Product



SERVICES FOR YOU

- 3F, No. 14, Prosperity Road II, Science-Based Industrial Park, Hsinchu, Taiwan 30078 R.O.C.



The Product

VESA mounting

Front View




Services for You

- 3F, No. 14, Prosperity Road II, Science-Based Industrial Park, Hsinchu, Taiwan 30078 R.O.C.



The Product

Internal IO and expansion

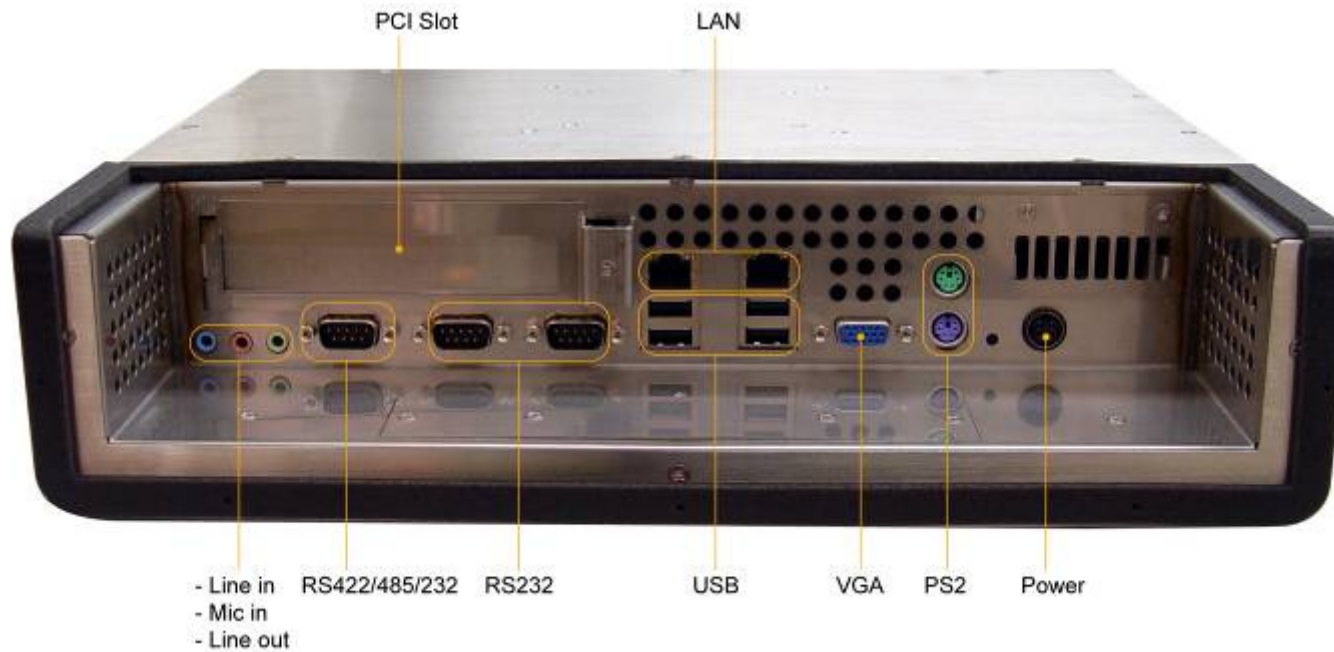

Services for You

- 3F, No. 14, Prosperity Road II, Science-Based Industrial Park, Hsinchu, Taiwan 30078 R.O.C.



The Product

External IO



Services for You

- 3F, No. 14, Prosperity Road II, Science-Based Industrial Park, Hsinchu, Taiwan 30078 R.O.C.



The Application

Industry Sectors _____



Food Processing



Pharmaceutical



Plastic processing



Cosmetic, Chemical



Construction



Wafer fabrication



The Application

Industry Sectors _____



Gasoline station



Mining



Oil plant



Chemical




Livestock and Agriculture




Recycle, waste treatment

The Application

1. Human-Machine Interface

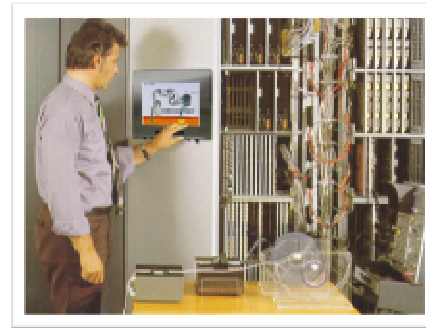

2. Production and machine information acquisition

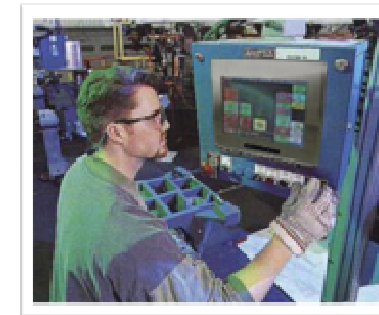

3. Process control and visualization



4. Mobil and outdoor use





The Advantage

- Full IP65 application
- Competitive pricing
- External IO customized definition
- 316 Stainless steel for food industrial standard
- Wide temperature range for harsh environment application
- Sunlight readable by anti reflection film
- Rugged and reliable
- Long life cycle

services for You



The Specification

Intel Atom N270 1.6GHz CPU
Intel 945 GSE + ICH7M Chipset
Award BIOS
DDR2 SoDIMM support up to 2GB
SVGA and XGA LCD panel PC
5 wires Resistive touch screen
2.5" anti-vibration SATA HDD
Bootable CF slot
PCI slot / PCMCIA slot / MiniPCI slot

Internal IO

- VGA x1
- Triple phone jack
- USB x4
- COM x 3
- PS2 x2
- LAN x 1
- Reset x1

External IO (predefined IP65 connector)

- Power x1, USB x2, PS2 x1,
COM x2, LAN x1



The Specification

DC 12~28V input

-20°C ~ 55°C maximum operating temp

10~90% humidity operating

Dimension 350x298x80mm

Weight 8.5kg

VESA 75/100 mm mounting

Vibration

Operating:

5~17Hz Amp 0.1”

17~500Hz 1.0G

Shock

Operating:

15g, 11mS, half sine wave

Services for You